




TCM60-Z - series

TCM60Z-05A




TCM60Z-05

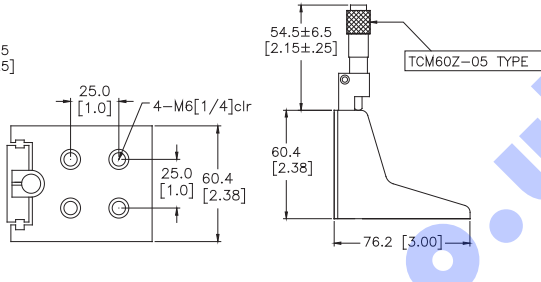

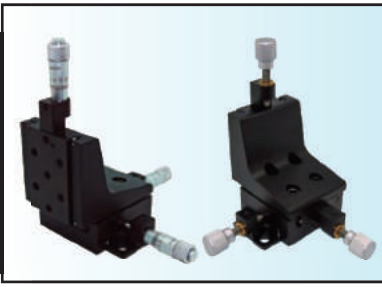



TCM60-XYZ - series

TCM60XYZ-05A



TCM60XYZ-05

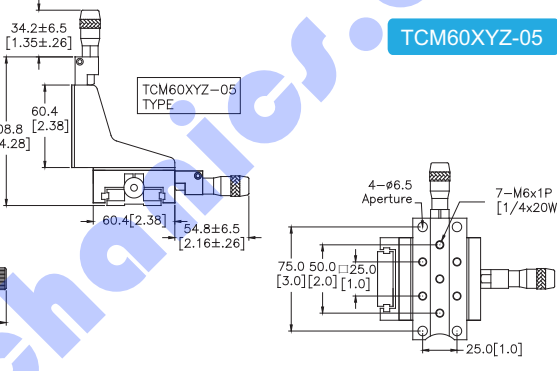





CS2 R / L

CS2 R / L

TCM60-XYZ + FPT = CS2 multi-axis positioning stage

θy : +5 / TX : 12 mm / TY : 12 mm / TZ : 6 mm

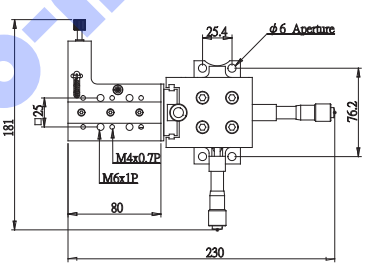

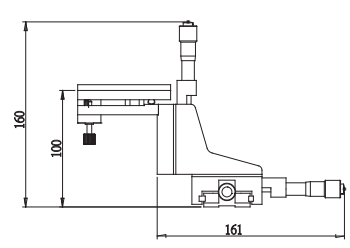

- **AC** = Cossed Roller Bearing / **M** = Micrometer / **100** = 100 pitch screw / **130** = 130 pitch screw
- **I** = To order Imperial model please add *I- * to Item number

Item Number	Drive Type (mm)	Travel Guide	Repeatability (mm)	Moving Parallelism (mm)	Read Resolution (mm)	Travel Range (mm)	Weight / Load (kg)
TCM60-XY-05	M	AC	0.005	± 0.005	0.01	± 7.5	0.32 / 10
TCM60-XY-05A	100	AC	0.005	± 0.005	----	± 7.5	0.28 / 10
TCM60-XY-05F	130	AC	0.005	± 0.005	----	± 7.5	0.28 / 10
TCM60-Z-05	M	AC	0.005	± 0.005	0.01	± 7.5	0.35 / 10
TCM60-Z-05A	100	AC	0.005	± 0.005	----	± 7.5	0.34 / 10
TCM60-Z-05F	130	AC	0.005	± 0.005	----	± 7.5	0.34 / 10
TCM60-XYZ-05	M	AC	0.005	± 0.005	0.01	± 7.5	0.85 / 5
TCM60-XYZ-05A	100	AC	0.005	± 0.005	----	± 7.5	0.83 / 5
TCM60-XYZ-05F	130	AC	0.005	± 0.005	----	± 7.5	0.83 / 5
CS2 (R / L)	M	AC	0.005	± 0.005	0.01	± 7.5	---