



FM3
SO

Kinematic Round Mounts with 3 adjusters

NEW




FM3SO-05K

Overview

- Features θ_x and θ_y 2 adjusters (standard precision 130 tpi fine screw)
- 100 tpi adjusters available
- Teflon Tip to protect and fix lens
- To order Imperial model please add * I - * to Item
- To order 130-pitch screws please add *F* to item

Specification & Item Numbers

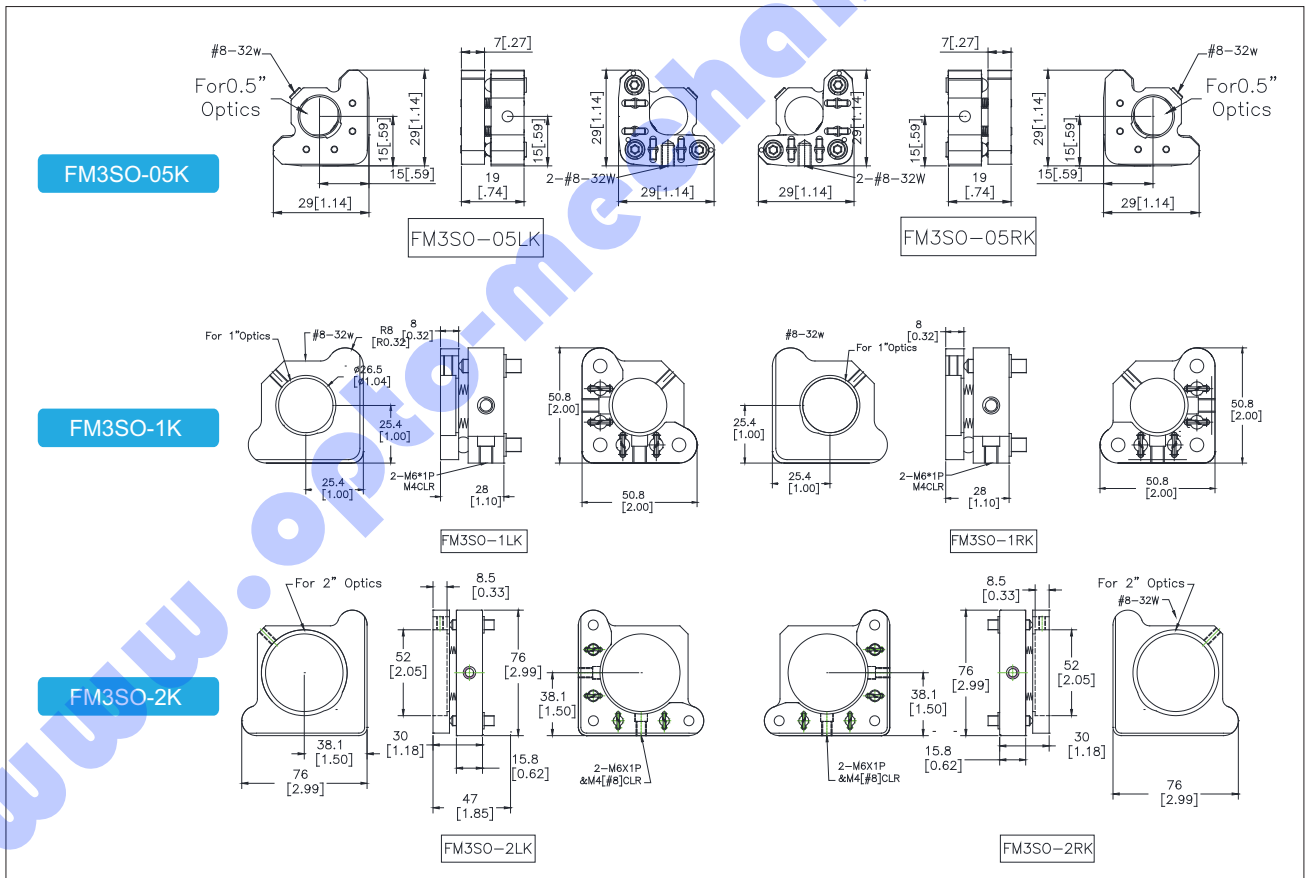

- **100** = 100 pitch screw / **130 (F)** = 130 pitch screw / To order Imperial model please add * I - * to Item number

Item Number	Optics Diameter \varnothing mm (inch)	Minimum Optics Thickness mm (inch)	Height of Holder Center mm (inch)	Travel Range (degree)	Weight (kg)
FM3SO-05K(F)	12.7 (0.5")	3	15	± 4	0.05
FM3SO-1K(F)	25.4 (1")	5	25.4	± 4	0.15
FM3SO-2K(F)	50.8 (2")	5	38.1	± 4	0.2