



PB

MPB

SAB

Solid Aluminum Boards

Optical Tables

Stages

Optical Mounts

Components

Motion Systems

Education Systems

Lasers

Optics & Crystals


Other Equipment



Overview

- Aluminum construction result excellent thermal stability
- *P *:Both surfaces grinded
- Customized specification is acceptable
- Standard screw pattern:
 - SAB : M6x0.7P per 25mm in metric version
#1/4-20w per 1" in imperial version
 - PB : M6x0.7P per 25mm in metric version
#8-32w per 1" in imperial version
 - MPB : M2x0.4P per 10mm in metric version
- To order the handle, please add item number # (HD150-1)
- To order Imperial model please add * I- * to Item

Specification & Item Numbers

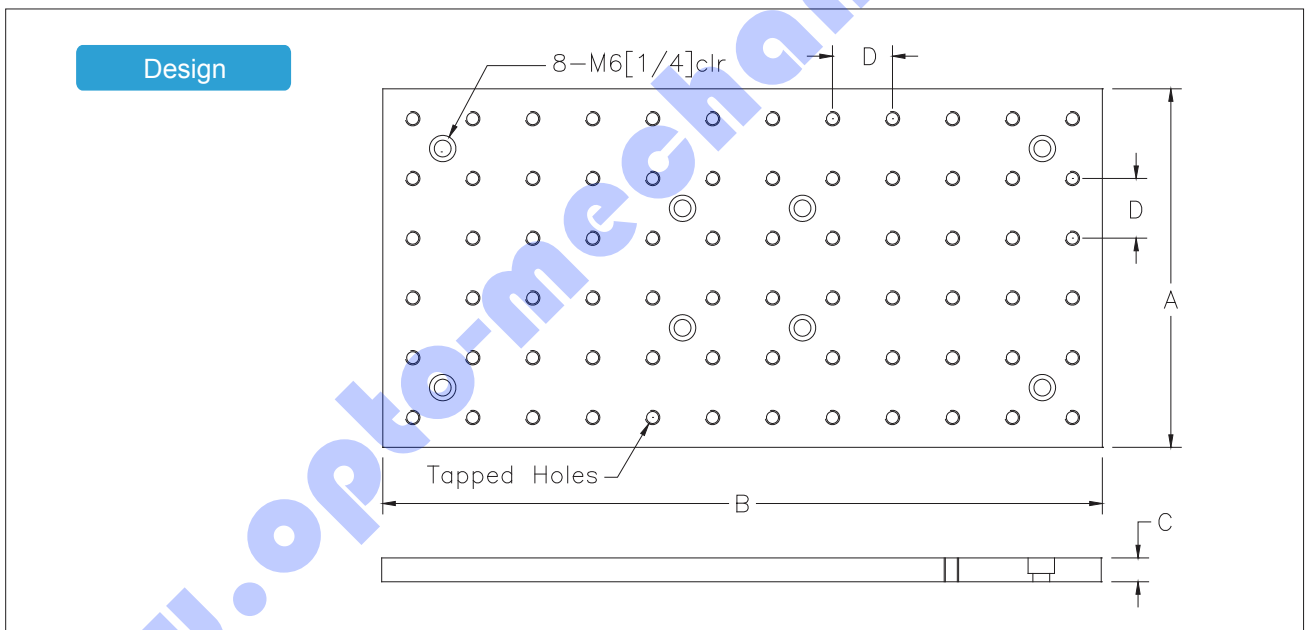

Item Numbers

Item Number	Size: AxB mm (inch)	Thickness: C mm (inch)	Tapped Holes Platter mm (inch)	Flatness (mm)	Tapped Holes	Weight (kg)
PB-1212	120 (5") x 120 (5")	10 (0.4")	25 (1.0") apart	±0.05	M4x0.7P or #8x32W	0.32
PB-1212P	120 (5") x 120 (5")	9.8 (0.38")	25 (1.0") apart	±0.015	M4x0.7P or #8x32W	0.32
PB-1220	120 (5") x 200 (8")	10 (0.4")	25 (1.0") apart	±0.05	M4x0.7P or #8x32W	0.56
PB-1220P	120 (5") x 200 (8")	9.8 (0.38")	25 (1.0") apart	±0.015	M4x0.7P or #8x32W	0.56
PB-2030	200 (8") x 300 (12")	10 (0.4")	25 (1.0") apart	±0.05	M4x0.7P or #8x32W	1.30
PB-2030P	200 (8") x 300 (12")	9.8 (0.38")	25 (1.0") apart	±0.015	M4x0.7P or #8x32W	1.30
PB-3030	300 (12") x 300 (12")	10 (0.4")	25 (1.0") apart	±0.05	M4x0.7P or #8x32W	2.33
PB-3030P	300 (12") x 300 (12")	9.8 (0.38")	25 (1.0") apart	±0.02	M4x0.7P or #8x32W	2.33